


- W.P. : 3000 PSI
- RETURN PORT & CASE DRAIN TO TANK: 250 PSI (MAX)
- SERVICE: SUBSEA SERVICE
- MATERIALS:
 EXTERNAL: 316 SS
 INTERNAL (SEALING): 440c, 416, 316
 INTERNAL (NON SEALING):
 CARBON STEEL, BRONZE
- ELASTOMERS: NITRILE, TEFLON

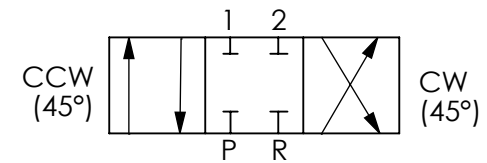

90° ROTARY OPERATION
 (NON DETENTED)
 THROTTLED FLOW @ 5°±1.5° OFF CENTER POSITION

PacSeal Hydraulics Inc.

VALVES, ACCUMULATORS, CONTROLS

<p style="text-align: center;">PROPRIETARY AND CONFIDENTIAL</p> <p style="font-size: small;">THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PacSeal Hydraulics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PacSeal Hydraulics IS PROHIBITED.</p>	TITLE	SIZE	DWG. NO.	REV
	Valve, SVS-25 Block Center Selector, Subsea	A	40-2122	B
		SCALE: 1:2	WEIGHT: 7.2	