

Model No. KR-150N5DFSA
 MAX INLET: 5000 PSI
 REGULATED OUTLET: 300-3000 PSI
 SPECIFIED FLOW: 150 GPM
 Cv Inlet: 14.9
 Cv Vent: 4.1
 VENT PORT: (2) 1" NPT
 INLET PORTS (2): 1" NPT
 OUTLET PORT: 1 1/2" NPT
 OPERATOR: FAILSAFE AIR MOTOR

MATERIALS:
 • BODY: STAINLESS STEEL
 • FLANGES & OPERATORS: CARBON STEEL
 • INTERNAL: STAINLESS STEEL
 • O-RINGS: BUNA (NITRILE)
 • BACKUPS: TEFLON
 • BOLTS: STEEL (A574)


TEMPERATURE RATING: -30°F TO 180°F
 WEIGHT: 105 LBS

NOTE:
 1. TURN CLOCKWISE TO LOCK FOR FAILSAFE AIR OPERATION
 2. TURN COUNTER-CLOCKWISE TO UNLOCK FOR MANUAL OPERATION

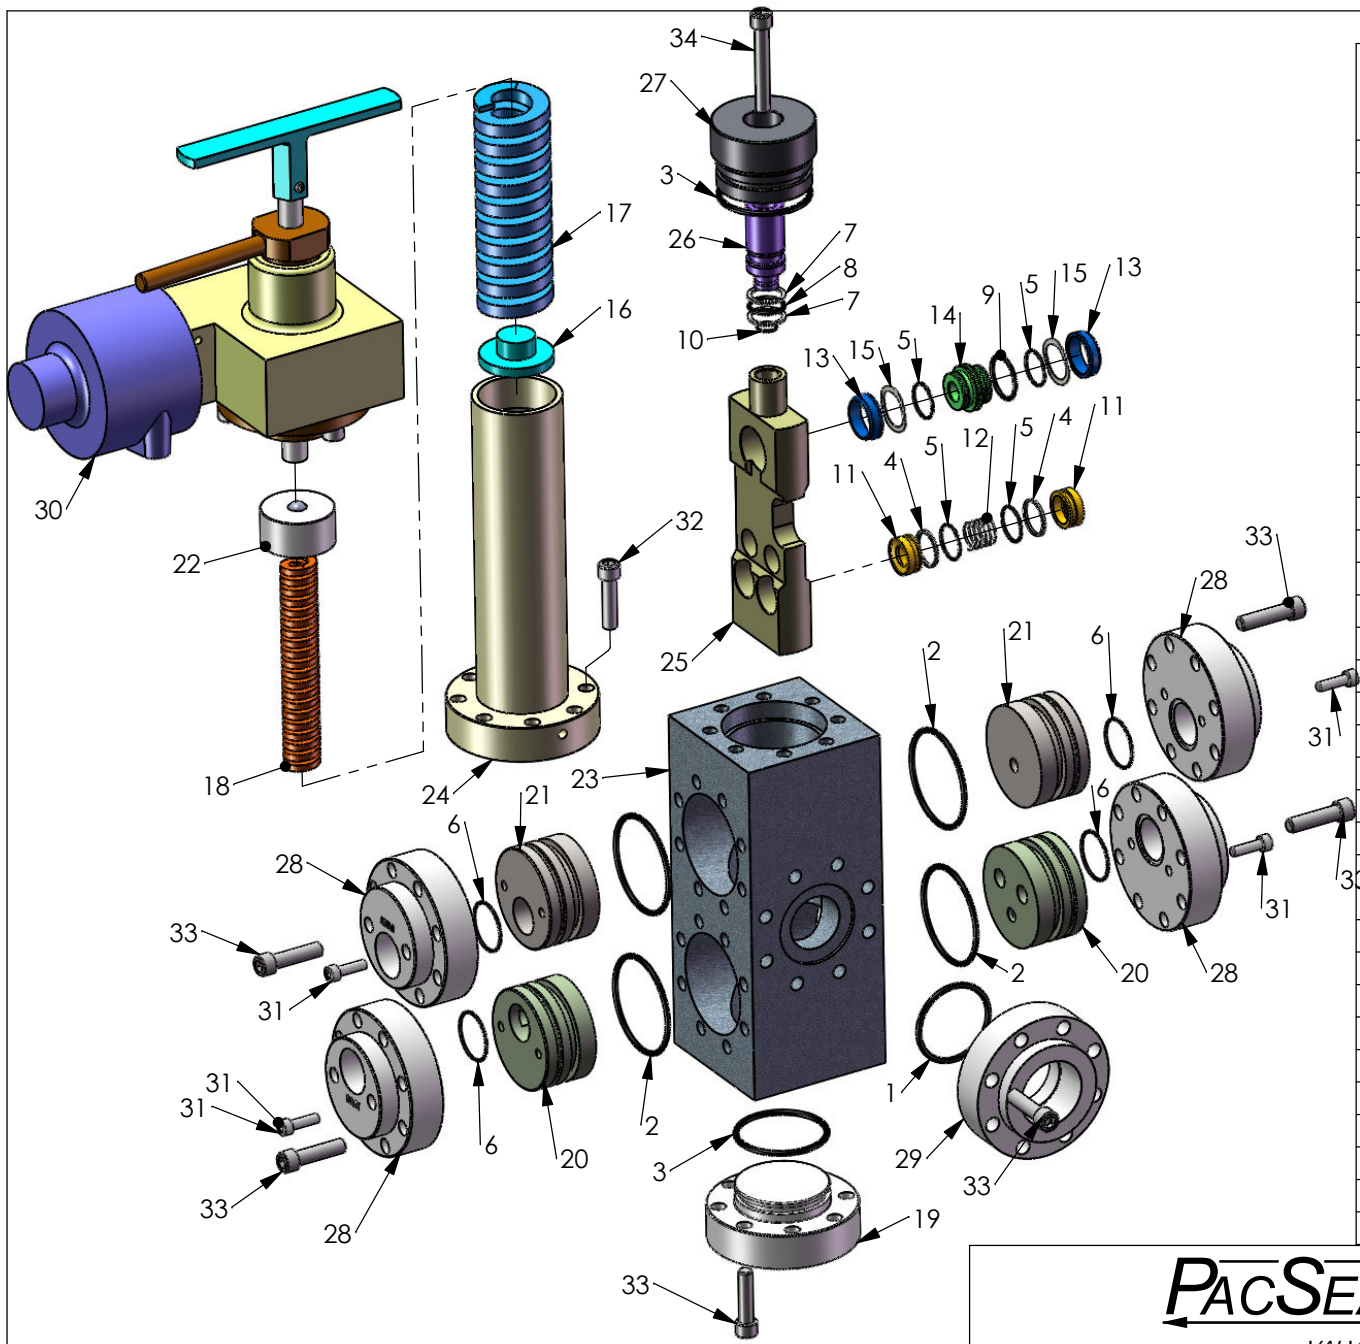
	NAME	DATE
DRAWN	FS	12/09
CHECKED	LB	12/09
ENG APPR.	JB	1/10

PacSeal Hydraulics
 TITLE:
 KR-150N5DFSA,
 w/Failsafe Operator

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PacSeal Hydraulics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PacSeal Hydraulics IS PROHIBITED.

COMMENTS:

THIRD ANGLE PROJECTION

SIZE	DWG. NO.	REV
A	40-1693	3
SCALE: 1:6	WEIGHT: 105	SHEET 1 OF 2



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	23-1126	O-Ring	1
2	23-1263	O-Ring	4
3	23-1319	O-Ring	2
4	23-1322	Backup Ring	4
5	23-1323	O-Ring	6
6	23-1325	O-Ring	4
7	23-1331	Backup Ring	2
8	23-1332	O-Ring	1
9	23-1334	O-Ring	1
10	23-1343	O-Ring	1
11	40-0014	Seal Ring, Supply	4
12	40-0110	Spring	2
13	40-0113	Seal Ring- Vent	2
14	40-0114	Valve, Cage	1
15	40-0115	Wave Spring	2
16	40-0134	Spring Plate	1
17	40-0143	Spring, Outer	1
18	40-0144	Spring, Inner	1
19	40-0197	Flange, Lower	1
20	40-0285	Flow Plate, Supply	2
21	40-0286	Flow Plate, Vent	2
22	40-0300	Spring Guide	1
23	40-0323	Body	1
24	40-0383	Ajustoment Head	1
25	40-0714	Seal Container	1
26	40-0717	Piston, Manual	1
27	40-0718	Piston Guide, Manual	1
28	40-1383	Flange, Inlet & Vent	4
29	40-1384	Flange, Outlet	1
30	40-1649	Actuator, KR FSA H.P.	1
31	50-0066	Bolt, SHCS	8
32	50-0069	Bolt, SHCS	8
33	50-0230	Bolt	48
34	50-0240	Bolt	1

PacSeal Hydraulics Inc.

VALVES, ACCUMULATORS, CONTROLS

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PacSeal Hydraulics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PacSeal Hydraulics IS PROHIBITED.

TITLE
**KR-150N5DFSA,
 w/Failsafe Operator**

SIZE A	DWG. NO. 40-1693	REV 3
SCALE: 1:5	WEIGHT: 105	SHEET 2 OF 2